

**Style:**

025: Weld-O-Lets (Groove)

035: Weld-O-Lets (Thread)

Size:

- DN25xDN32-DN200xDN200 | 1X1 ¼-8X8"

Maximum Working Pressure:

- Pressure Ratings conform to Style 101H Couplings (refer to publication

Material Specifications**Fittings:**

Carbon Steel confirming to requirement of NFPA, other material also available, please consult VISION.

Coating:


Orange-Standard

Red- Optional

Hot-Dipped, Zinc Galvanized-Optional

Style 025,035 Weld-O-lets

VISION

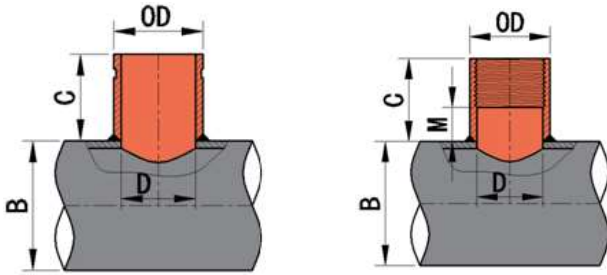

OD	B	C	D	E	F	Approx. Wt. Ea.
In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	Lbs./kg
1× 25×	1¼-1½	3.00	1.05	1.31	0.13	0.4
	32-40	76	26.7	33.4	3.4	0.2
	1½-2	3.00	1.05	1.31	0.13	0.4
	40-50	76	26.7	33.4	3.4	0.2
	2-2½	3.00	1.05	1.31	0.13	0.4
	50-65	76	26.7	33.4	3.4	0.2
	2½-4	3.00	1.05	1.31	0.13	0.4
	65-100	76	26.7	33.4	3.4	0.2
	5-8	3.00	1.05	1.31	0.13	0.4
	125-200	76	26.7	33.4	3.4	0.2
1¼× 32×	1¼	3.00	1.37	1.67	0.14	0.7
	32	76	34.7	42.4	3.6	0.3
	1½	3.00	1.37	1.67	0.14	0.7
	40	76	34.7	42.4	3.6	0.3
	2-2½	3.00	1.37	1.67	0.14	0.7
	50-65	76	34.7	42.4	3.6	0.3
	3-4	3.00	1.37	1.67	0.14	0.7
	80-100	76	34.7	42.4	3.6	0.3
	5-8	3.00	1.37	1.67	0.14	0.7
	125-200	76	34.7	42.4	3.6	0.3
1½× 40×	1½	3.00	1.61	1.90	0.15	0.7
	40	76	40.9	48.3	3.7	0.3
	2	3.00	1.61	1.90	0.15	0.7
	50	76	40.9	48.3	3.7	0.3
	2½	3.00	1.61	1.90	0.15	0.7
	65	76	40.9	48.3	3.7	0.3
	3-4	3.00	1.61	1.90	0.15	0.7
	80-100	76	40.9	48.3	3.7	0.3
	5-8	3.00	1.61	1.90	0.15	0.7
	125-200	76	40.9	48.3	3.7	0.3
2× 50×	2	3.00	2.07	2.37	0.15	0.9
	50	76	52.5	60.3	3.9	0.4
	2½	3.00	2.07	2.37	0.15	0.9
	65	76	52.5	60.3	3.9	0.4
	3	3.00	2.07	2.37	0.15	0.9
	80	76	52.5	60.3	3.9	0.4
	4	3.00	2.07	2.37	0.15	0.9
	100	76	52.5	60.3	3.9	0.4
	5	3.00	2.07	2.37	0.15	0.9
	125	76	52.5	60.3	3.9	0.4
	6	3.00	2.07	2.37	0.15	0.9
	150	76	52.5	60.3	3.9	0.4
	8	3.00	2.07	2.37	0.15	0.9
	200	76	52.5	60.3	3.9	0.4

OD	B	C	D		E	F		Approx. Wt. Ea.	
			SCH10	SCH40		SCH10	SCH40	025	025R
In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	Lbs./kg	Lbs./kg
2½× 65×	2½	3.00	2.64	2.47	3.00	0.12	0.20	1.5	0.9
	65	76	67	62.7	76.2	3.0	5.2	0.7	0.4
	3	3.00	2.64	2.47	3.00	0.12	0.20	1.5	0.9
	80	76	67	62.7	76.2	3.0	5.2	0.7	0.4
	4	3.00	2.64	2.47	3.00	0.12	0.20	1.5	0.9
	100	76	67	62.7	76.2	3.0	5.2	0.7	0.4
	5	3.00	2.64	2.47	3.00	0.12	0.20	1.5	0.9
	125	76	67	62.7	76.2	3.0	5.2	0.7	0.4
	6	3.00	2.64	2.47	3.00	0.12	0.20	1.5	0.9
	150	76	67	62.7	76.2	3.0	5.2	0.7	0.4
3× 80×	3	3.00	3.27	3.07	3.50	0.12	0.22	2.0	1.1
	80	76	83	78	88.9	3.0	5.5	0.9	0.5
	4	3.00	3.27	3.07	3.50	0.12	0.22	2.0	1.1
	100	76	83	78	88.9	3.0	5.5	0.9	0.5
	5	3.00	3.27	3.07	3.50	0.12	0.22	2.0	1.1
	125	76	83	78	88.9	3.0	5.5	0.9	0.5
	6	3.00	3.27	3.07	3.50	0.12	0.22	2.0	1.1
	150	76	83	78	88.9	3.0	5.5	0.9	0.5
	8	3.00	3.27	3.07	3.50	0.12	0.22	2.0	1.1
	200	76	83	78	88.9	3.0	5.5	0.9	0.5
4× 100×	4	4.02	4.25	4.02	4.50	0.12	0.24	3.7	2.0
	100	102	108	102	114.3	3.0	6.0	1.7	0.9
	5	4.02	4.25	4.02	4.50	0.12	0.24	3.7	2.0
	125	102	108	102	114.3	3.0	6.0	1.7	0.9
	6	4.02	4.25	4.02	4.50	0.12	0.24	3.7	2.0
	150	102	108	102	114.3	3.0	6.0	1.7	0.9
	8	4.02	4.25	4.02	4.50	0.12	0.24	3.7	2.0
	200	102	108	102	114.3	3.0	6.0	1.7	0.9
	6	4.02	6.38	6.06	6.63	0.12	0.28	6.6	2.9
	150	102	162	154	168.3	3.0	7.1	3.0	1.3
8× 200×	8	4.02	6.38	6.06	6.63	0.12	0.28	6.6	2.9
	200	102	162	154	168.3	3.0	7.1	3.0	1.3
8× 200×	8	4.02	8.35	7.99	8.63	0.12	0.32	10.1	3.7
	200	102	212	203	219.1	3.0	8.2	4.6	1.7



Shanghai Vision Mechanical Joint Ltd., Co.,

Address: Jinlan Rd. 221, Jiading Industrial Park, Shanghai, China

Tel: 0086-21-5954-6862, 5954-6811, Fax: 0086-21--5954-3888 Web: www.visionmfr.com