




Designed to mount CPVC pipe to wood or composite wood joints with a Minimum 3/8" thickness, Galvanized steel, Beveled edge design.

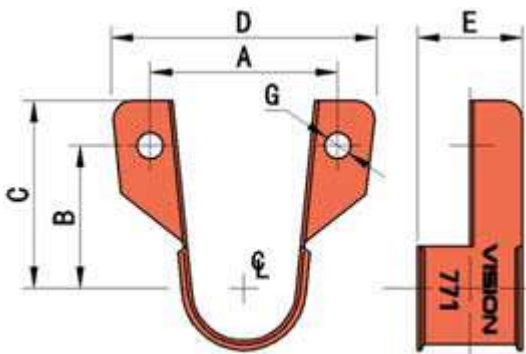

Pipe Size	A	B	C	D	E	G	Approx. Wt. Ea.
In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	In/mm	Lbs./kg
¼	1.97	1.50	1.97	2.76	1.10	0.28	0.09
20	50.0	38.0	50.0	70.0	28.0	7.0	0.04
1	2.20	1.50	1.97	3.15	1.10	0.28	0.11
25	56.0	38.0	50.0	80.0	28.0	7.0	0.05
1¼	2.60	1.73	2.36	3.74	1.10	0.28	0.11
32	66.0	44.0	60.0	95.0	28.0	7.0	0.05
1½	2.99	1.89	2.56	4.13	1.10	0.28	0.13
40	76.0	48.0	65.0	105.0	28.0	7.0	0.06
2	3.46	1.97	2.68	4.53	1.10	0.28	0.15
50	88.0	50.0	68.0	115.0	28.0	7.0	0.07