

**Size Range:** 3/4" through 12"(20-300mm)

**Material:** 304 stainless steel

**Service:** Recommended for the suspension of stationary pipe lines.

**Maximum Temperature:** 650° F/343°C

**Approvals:** Complies with Federal Specification A-A-1192A (Type 1), WW-H-171-E (Type 1),ANSI/MSS SP-69 and MSS SP-58 (Type 1).


**Installation:** Hanger load nut above clevis must be tightened securely to assure proper hanger performance.

**Adjustment:** Vertical adjustment without removing pipe may be made from 3/8" through 5 1/8",varying with the size of clevis. Tighten upper nut after adjustment.

**Features:**

- Design has yoke on outside of lower U-strap so yoke cannot slide toward center of bolt,thus bending of bolt is minimized.
- Sizes 5" and up have rod and two nuts instead of bolt and nut; thread length on clevisrod is such that the thread locks the nuts in place, and threads are not in shear plane.

**Notes:** Punched forming holes may be present on certain sizes of this clevis hanger. These holes are solely for the purpose of manufacturing, and do not effect the structural integrity or load carrying capacities of these hangers.

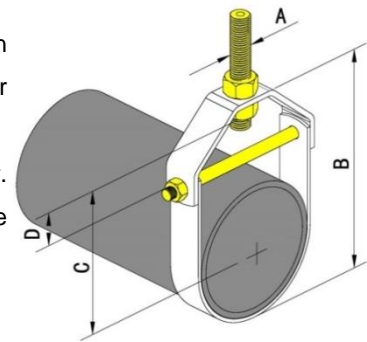

| Pipe Size | Rod Size | A     | B     | C     | D     | Width | Max Load | Approx. Wt. Ea. |
|-----------|----------|-------|-------|-------|-------|-------|----------|-----------------|
| In/mm     | In/mm    | In/mm | In/mm | In/mm | In/mm | In/mm | Lbf/N    | Lbs./kg         |
| 3/4       | 3/8      | 2.76  | 1.61  | 0.67  | 0.87  | 610   | 0.22     |                 |
| 20        | M10      | 70.0  | 41.0  | 17.0  | 22.0  | 2713  | 0.10     |                 |
| 1         | 3/8      | 3.27  | 1.89  | 0.87  | 0.87  | 730   | 0.27     |                 |
| 25        | M10      | 83.0  | 48.0  | 22.0  | 22.0  | 3247  | 0.12     |                 |
| 1 1/4     | 3/8      | 3.15  | 1.85  | 0.71  | 0.87  | 730   | 0.26     |                 |
| 32        | M10      | 80.0  | 47.0  | 18.0  | 22.0  | 3247  | 0.12     |                 |
| 1 1/2     | 3/8      | 3.54  | 2.09  | 0.79  | 0.87  | 730   | 0.31     |                 |
| 40        | M10      | 90.0  | 53.0  | 20.0  | 22.0  | 3247  | 0.14     |                 |
| 2         | 3/8      | 4.37  | 2.64  | 0.98  | 0.87  | 730   | 0.34     |                 |
| 50        | M10      | 111.0 | 67.0  | 25.0  | 22.0  | 3247  | 0.15     |                 |
| 2 1/2     | 1/2      | 5.39  | 4.17  | 1.61  | 1.10  | 1350  | 0.96     |                 |
| 65        | M12      | 137.0 | 106.0 | 41.0  | 28.0  | 6009  | 0.44     |                 |
| 3         | 1/2      | 6.30  | 4.49  | 1.93  | 1.10  | 1350  | 1.07     |                 |
| 80        | M12      | 160.0 | 114.0 | 49.0  | 28.0  | 6009  | 0.49     |                 |
| 4         | 5/8      | 7.76  | 4.96  | 1.65  | 1.10  | 1430  | 1.32     |                 |
| 100       | M16      | 197.0 | 126.0 | 42.0  | 28.0  | 6365  | 0.60     |                 |
| 5         | 5/8      | 9.25  | 5.98  | 2.17  | 1.10  | 1430  | 1.65     |                 |
| 125       | M16      | 235.0 | 152.0 | 55.0  | 28.0  | 6365  | 0.75     |                 |
| 6         | 3/4      | 10.87 | 6.54  | 2.24  | 1.50  | 1940  | 2.68     |                 |
| 150       | M20      | 276.0 | 166.0 | 57.0  | 38.0  | 8635  | 1.22     |                 |
| 8         | 7/8      | 14.02 | 8.07  | 2.91  | 1.50  | 2000  | 3.75     |                 |
| 200       | M22      | 356.0 | 205.0 | 74.0  | 38.0  | 8900  | 1.70     |                 |
| 10        | 1        | 17.56 | 10.08 | 3.54  | 1.89  | 3600  | 7.74     |                 |
| 250       | M22      | 446.0 | 256.0 | 90.0  | 48.0  | 16020 | 3.51     |                 |
| 12        | 1 1/8    | 20.91 | 11.77 | 4.25  | 1.89  | 3800  | 11.62    |                 |
| 300       | M22      | 531.0 | 299.0 | 108.0 | 48.0  | 16910 | 5.27     |                 |

